



Technical Report 08-09

Road Weather Modelling System: Verification for 2007-2008 Road Weather Season



Claus Petersen, Alexander Mahura, Bent Sass, Torben Pedersen



Colophon

Serial title:

Technical Report 08-09

Title:

Road Weather Modelling System: Verification for 2007-2008 Road Weather Season

Subtitle:

Author(s):

Claus Petersen, Alexander Mahura, Bent Sass, Torben Pedersen

Other contributors:

Responsible institution:

Danish Meteorological Institute

Language:

English

Keywords:

Road weather model system, road conditions model, road surface temperature, verification, score

Url:

www.dmi.dk/dmi/tr08-09.pdf

ISSN:

1399-1388 – on-line

Version:

Website:

www.dmi.dk

Copyright:

Danish Meteorological Institute

Application and publication of data and text is allowed with proper reference and acknowledgment



Content:

Abstract	4
Resumé	4
1. Introduction	5
2. Road Weather Model Verification	5
2.1. General Approach	5
2.2. Road Weather Season 2007-2008	6
MAE and BIAS for Ts	6
Scores for Ts	8
3. Concluding Remarks	9
Acknowledgments	10
References	10
Appendix 1. Changes in RWM Setup during Road Seasons	12
Appendix 2. Verification of 2 m Air Temperature for Road Season 2007-2008	13
Appendix 3. Verification of 2 m Dew Point Temperature for Road Season 2007-2008	14



Abstract

For the last road weather season (1 October – 1 May) 2007/2008, the scores for the 3 hour forecasts of the road surface temperature with an error of less than $\pm 1^{\circ}\text{C}$ is almost 81%, respectively, based on more than 442 thousand corresponding forecasts. The overall seasonal averages of the bias and mean absolute error are 0.18°C and 0.78°C for the last season. It shows a similar performance of the road conditions model compared with the season 2006-2007, where the bias and mean absolute error were 0.22°C and 0.74°C , respectively.

Resumé

For den sidste vejsæsoner (1. October – 1. May) 2007/2008 er scoren for forudsagt vejtemperatur henholdsvis 81%, hvor scoren er defineret som den procentvise antal af 3 timers prognoser for vejtemperatur der har en fejl mindre end $\pm 1^{\circ}\text{C}$. Der indgår 442 tusinde prognoser i beregningen af scoren for de to sæsoner. For hele sæsonen er bias og middelfejlen henholdsvis 0.18°C og 0.78°C for den sidste sæson. Det er omtent det same som for sæsonen 2006/2007, hvor bias og middelfejlen var henholdsvis 0.22°C og 0.74°C .



1. Introduction

The road weather forecasts done by the Road Weather Model (RWM) system is an important operational product produced by DMI. It is, therefore, relevant after each season to evaluate the performance of the Road Conditions Model (RCM: *Sass, 1992; 1997*) in order to continue further development and improvement of the system. In addition, users of the RWM system might have an interest in gaining access to verification report after each season. Briefly, the RWM system uses the continuous observations from the synoptic weather stations and road stations of the Danish road network along with the meteorological output from the DMI-HIRLAM (High Resolution Limited Area Model; *Sass et al., 2002*) numerical weather prediction (NWP) model as input to produce 24 hour forecasts every hour. For a description of the RWM operational system see the manual *Glat-Term (2004)*. For some previous road weather seasons the verification reports are given by *Kmit & Sass (1999); Sass & Petersen (2000); Petersen & Nielsen (2000; 2003), Petersen et al., (2008)*. Operational irregularities for the 2007-2008 road seasons are listed in Appendix 1 which shows also changes and modifications made in the DMI-HIRLAM and RWM systems, and RCM model.

2. Road Weather Model Verification

2.1. General Approach

A road weather season is considered to continue from October through April. The reason for this period is based on a potential risk of slippery road in these months. In the last years the warmer winters have reduced the number of slippery road cases (for example, for the last road weather season, only a few forecasts has been done in October 2007 and April 2008).

The verification of the RWM system performance is based on evaluation of the DMI-HIRLAM model (see corresponding quarterly reports at the DMI web-site) used for road forecasts, which is a specialized version of the DMI-HIRLAM where key parameters are calculated in more than 400 observational points – road stations. In these points the verification is done. The verification of the RCM forecasts for key parameters is done for the road surface temperature (T_s), 2m air temperature (T_a) and 2 m dew point temperature (T_d), as well as scores reflecting a frequency of good/poor quality forecasts. To make verification two conditions are required, i.e. both the observational data and modeled forecasts have to be available at exact times of observation vs. forecast. If one of these is missing then both are not used in verification. Note, that usually the missing forecasts account for 1-2%. In almost all cases the missing forecasts are related to computer processing and archiving problems (or missing input meteorological data from the DMI-HIRLAM model).

This verification includes analysis of all forecasts (i.e. from 01 to 24 hours); however, only forecasts, where both the observed and forecasted T_s are within a range of $\pm 3^\circ\text{C}$, are included. Moreover, the major interest is represented by the first six hour forecasts (i.e. the responsible time for the road authorities and representing the time period on a diurnal cycle when the probability of the slippery road conditions is the highest). Note, all road stations (i.e. more than 400 in total) of the Danish road network are included. In general, the RCM shows a good performance compared with a simple linear trend forecast (assuming that the temperature tendency that existed an hour ago also holds for the remainder of the forecast). The verification of RCM for T_s , T_a , and T_d for the road seasons is given by the mean absolute error (MAE), mean error (BIAS), and error frequencies (%) of T_s for 3 hour RCM forecasted values.

2.2. Road Weather Season 2007-2008

MAE and BIAS for T_s

The Figures 1-2 show the bias and mean absolute error, MAE for road surface temperature (T_s) during the first six hour RCM forecasts. As seen at 5 hour RCM forecasts: the highest bias is 0.36°C in October 2007, and the lowest is -0.09°C in December 2007. During the road season, on average, it was 0.18°C . The highest MAE of 0.85°C is observed in November 2007 and the lowest – 0.65°C – is observed in April 2008. During the road season, on average, it was 0.78°C . The summary of monthly variability for MAEs and BIASes of the T_s , T_a , and T_d temperatures at 5 hour forecasts for the road season 2007-2008 with the corresponding number of the RCM forecasts is given in Table 1 (note, April 2008 has been also included due to increased number of situations with close to 0°C conditions).

Month Year		Oct 2007	Nov 2007	Dec 2007	Jan 2008	Feb 2008	Mar 2008	Apr 2008
BIAS	T_s	0.36	0.19	-0.09	0.24	0.14	0.31	0.19
	T_a	0.84	0.13	-0.18	-0.08	-0.24	-0.06	0.21
	T_d	0.74	0.35	0.01	0.38	0.39	0.23	0.53
MAE	T_s	0.74	0.85	0.82	0.71	0.75	0.84	0.65
	T_a	1.46	0.91	0.97	0.64	0.73	0.83	1.01
	T_d	1.41	0.96	0.82	0.75	0.85	0.96	1.05
RCM forecasts		10839	75341	60107	117823	63747	76879	14830
% of $T_{s\text{for}} > \pm 2^\circ\text{C}$		1.84	3.39	2.99	1.84	2.77	4.54	1.90

Table 1. Summary of monthly MAEs and BIASes of the road surface temperature (T_s), air temperature (T_a), and dew point temperature (T_d) at 5 hour forecasts for the road season 2007-2008 with the corresponding number of the RCM forecasts, and percentage of the T_s forecasts higher than $\pm 2^\circ\text{C}$.

As seen the percentage of the T_s forecasts higher than $\pm 2^\circ\text{C}$ is low (on average 2.75%) ranging from 1.84% (October 2007 and January 2008) to 4.54% (March 2008). The bias and mean absolute error for the T_a and T_d temperatures at the height of 2 meters above the ground are given in Appendixes 2-3.

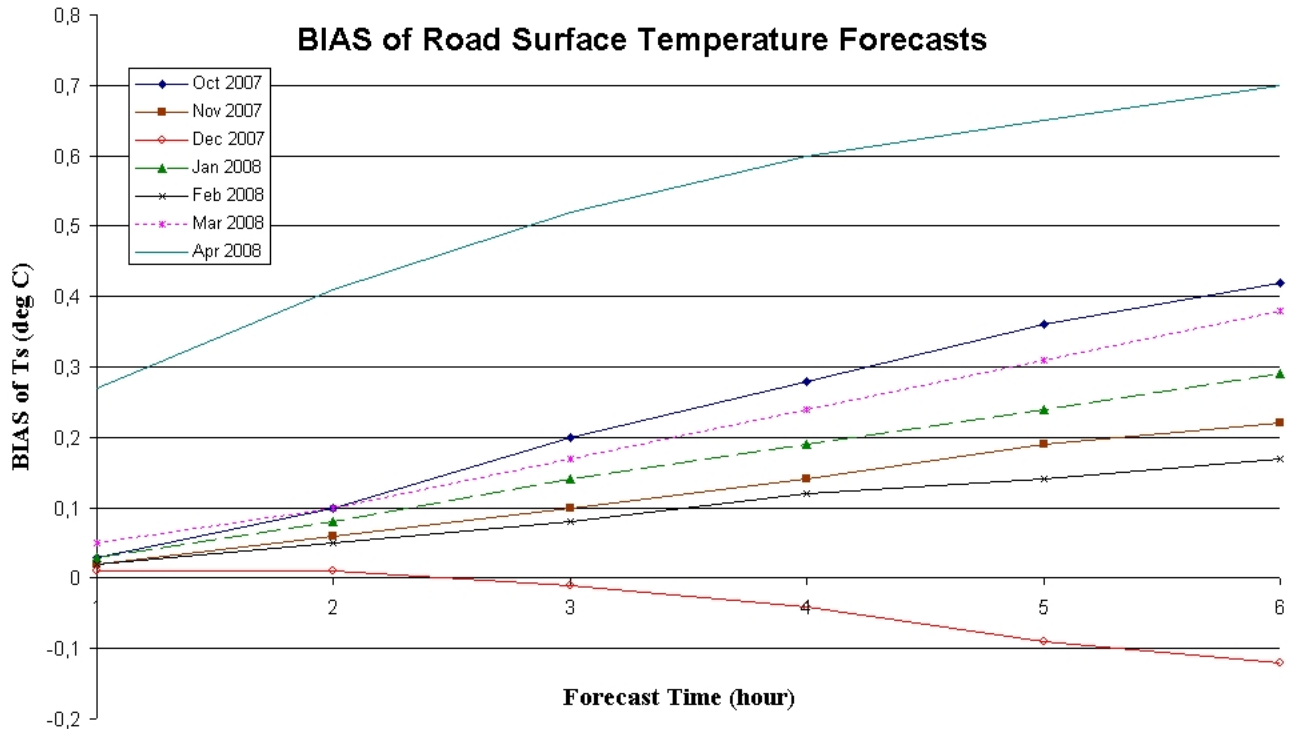


Figure 1. Monthly variability of the mean error (BIAS) of the road surface temperature (T_s) vs. forecast time for the road weather season 2007-2008.

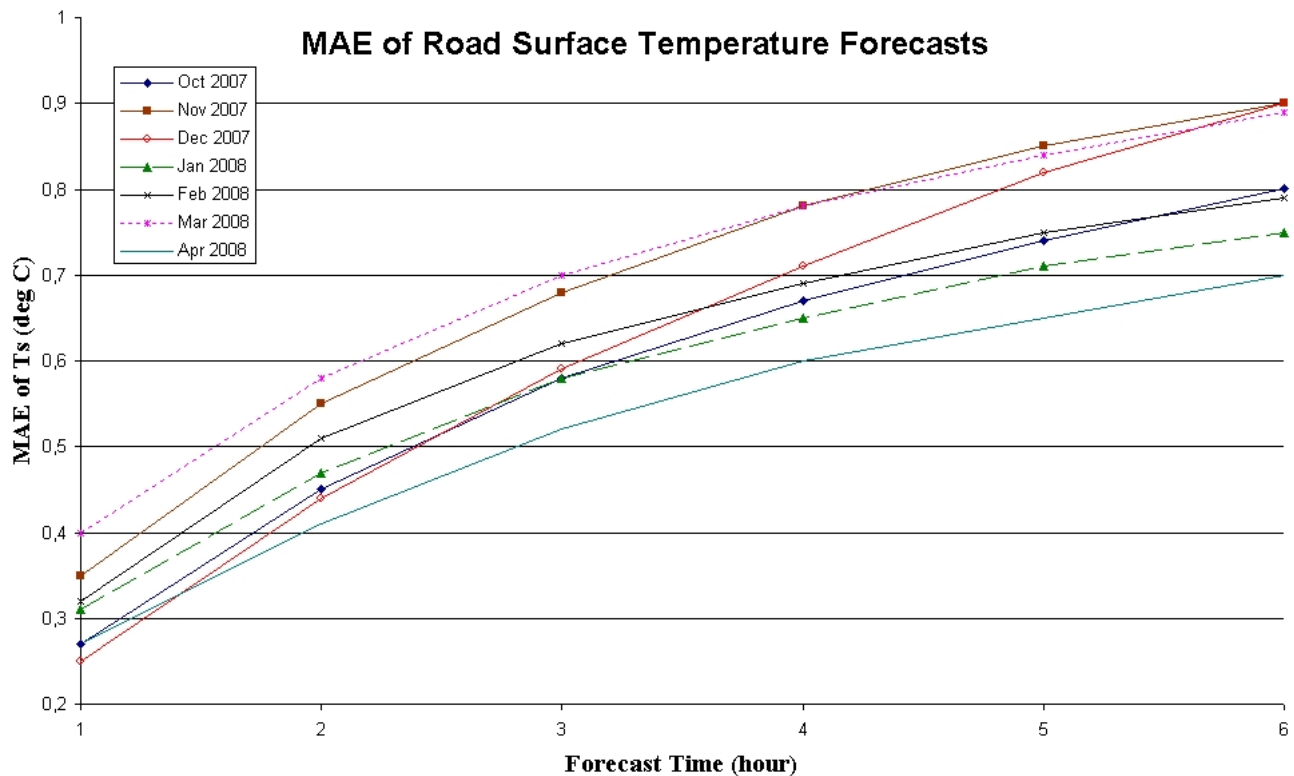


Figure 2. Monthly variability of the mean absolute error (MAE) of the road surface temperature (T_s) vs. forecast time for the road weather season 2007-2008.

Scores for Ts

The monthly variability of the road surface temperature (T_s) deviations as error frequencies (%) for the Danish road stations based on 3 hour RCM forecasts (in total **442268**) is shown in Figure 3. For this figure all analysis times are included, and the frequencies are divided into one degree intervals, with the highest frequencies corresponding to the temperature intervals: from -1°C to 0°C and from 0°C to $+1^{\circ}\text{C}$. Note, all other intervals have substantially lower frequencies. For this road season, approximately 81% of the forecasts are within $\pm 1^{\circ}\text{C}$ of the observed values (Table 2).

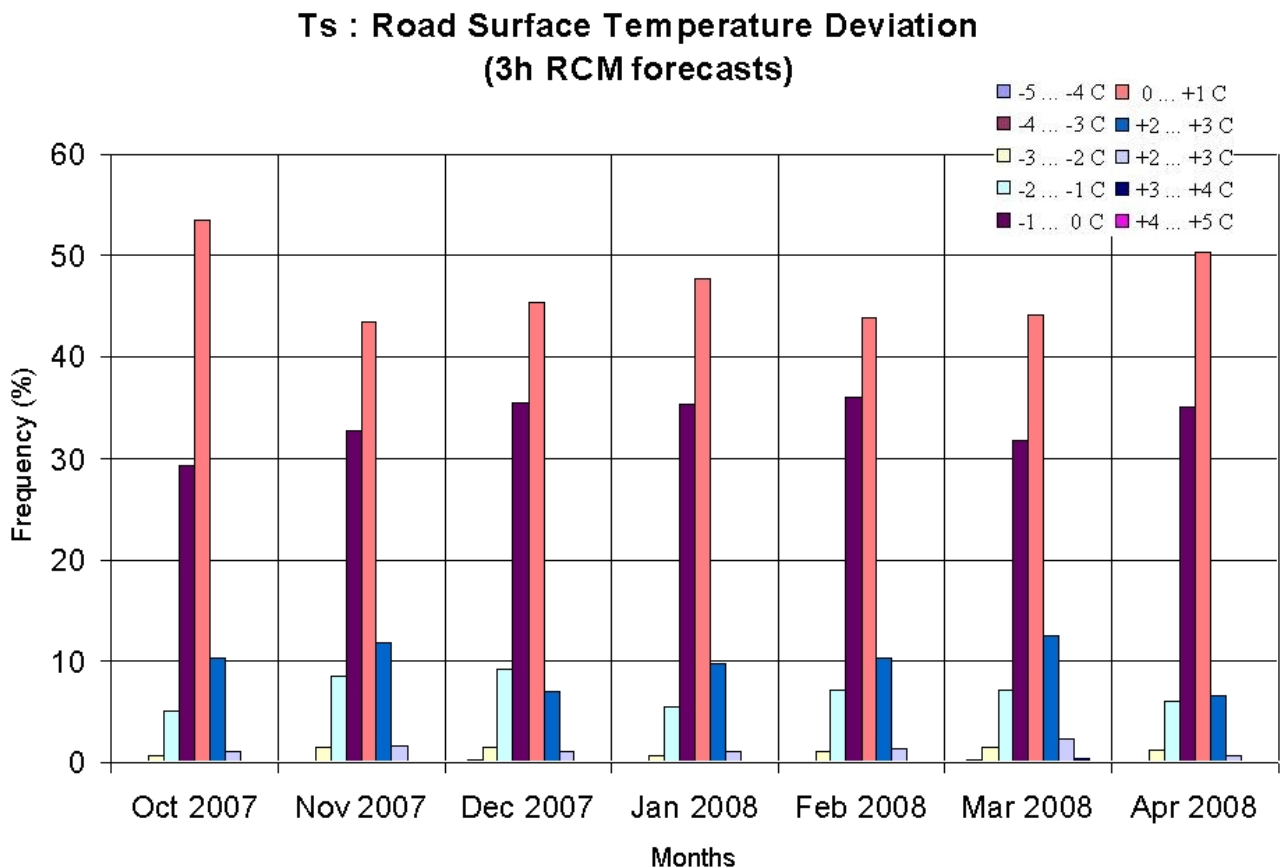


Figure 3. Monthly variability of the road surface temperature (T_s) deviations as error frequencies (%) for the Danish road stations based on 3 hour RCM forecasts for season 2007-2008.

Road Season	2007-08	
	scores	N
October	82,72	12369
November	76,28	78434
December	80,87	63487
January	83,05	122915
February	79,83	67884
March	75,87	80306
April	85,53	16873
Season	80,59	442268

Table 2. Summary of monthly scores of for the RCM forecasts within a range of $\pm 1^{\circ}\text{C}$ with the corresponding number of forecasts and observations.

3. Concluding Remarks

There have only been a few changes in the RCM in the last seasons. This is also indicated in the verification which has a slightly lower score for the last season compared with the previous one (2006-2007). There is a weak tendency to higher verification scores of the road surface and air temperatures in December-January. For the last three seasons 2005-2006, 2006-2007, and 2007-2008 the score for 3 hour T_s forecasts (in the interval $\pm 3^\circ\text{C}$) with an error of less than $\pm 1^\circ\text{C}$ is almost 80, 83 and 81%. For each month of these seasons the score is listed in the summarized Table given below.

Road Season	2005-06		2006-07		2007-08	
	scores	N	scores	N	scores	N
October	88,5	4273	97,1	35	82,7	12369
November	73,5	71760	79,7	21644	76,3	78434
December	80,9	137505	75,0	24106	80,9	63487
January	83,2	173149	76,5	55189	83,1	122915
February	81,5	152042	84,4	127007	79,8	67884
March	71,7	96479	84,2	31546	75,9	80306
April					85,5	16873
Season	79,9	635208	82,8	259527	80,6	442268

During the previous two seasons, for the road surface temperature, T_s , the bias has changed from 0.31°C to 0.22°C , and the mean absolute error has been slightly decreased from 0.78°C to 0.74°C . For the air temperature, T_a , the bias has been improved from 0.15°C to -0.02°C , and the mean absolute error changed from 0.80°C to 0.77°C . For the dew point temperature, T_d , the bias has changed from 0.27°C to 0.33°C , and the mean absolute error remained the same of 0.86°C .

For the season 2007-2008, for the road surface temperature, T_s , the bias has changed from 0.22°C to 0.18°C , and the mean absolute error has slightly increased from 0.74°C to 0.78°C . For the air temperature, T_a , the bias remained close to zero (-0.02°C vs. -0.04°C), and the mean absolute error became 0.81°C . For the dew point temperature, T_d , the bias has slightly improved from 0.33°C to 0.31°C , and the mean absolute error remained almost the same (0.87°C).

Average seasonal values of the mean error, BIAS and mean absolute error, MAE for the Danish road seasons of 2005-2008 are given in the Table below.

Road Season		2005-06	2006-07	2007-08
BIAS	Ts	0.31	0.22	0.18
	Ta	0.15	-0.02	-0.04
	Td	0.27	0.33	0.31
MAE	Ts	0.78	0.74	0.78
	Ta	0.80	0.77	0.81
	Td	0.86	0.86	0.87
Score		79.9	82.8	80.6



There may be several factors influencing the verification scores for the road surface temperature prediction in the current season compared with the previous seasons and first of all, the natural variability of the weather conditions is considerable from year to year. The last season is considered to be one of the warmest in the Danish records, and it is reflected also in the quarterly DMI-HIRLAM model verification reports.

There are a number of factors which may have influenced the performance of the RCM during the recent seasons. This has been described in Appendix 1. Note, for individual road stations there can be a large difference in verification score even though they are situated close to each other, and this difference can also be large from one county to another. Also the climatology in DMI-HIRLAM data, and especially from the road stations located close to the coast, can affect the result. However, the most needed improvement is a better representation of spatial variability of simulated meteorological parameters used in the RCM as input. This can be done by changing of the horizontal resolution of the DMI-HIRLAM NWP model (i.e. from 15 km to 5 km), and this is one of the tasks of the VIKING-6 “Road Segment Forecasting” (RSF) project for the year 2008. In the future it seems useful to consider “problematic” cases showing poor forecasting of T_s , e.g. with difficult atmospheric conditions. This needs to be done in order to estimate more clear impact of modifications in the RWM system. Several such cases should be considered when testing new methods for predicting the critical weather parameters such as cloud cover and precipitation, improved shadow measurements.

Acknowledgments

The computer facilities at the Danish Meteorological Institute (DMI) have been employed extensively. The Danish synoptical meteorological data from the DMI archives have been used in this study. The authors are thankful for collaboration to the DMI Computer Support.

The funding was provided within the frameworks of the joint Danish Road Directorate (DRD) and DMI project entitled “*Road Segment Forecasts*” (2006-2008) within framework of the VIKING-6 Projects.

References

- GlatTerm, **2004**: Brugervejledning til GlatTerm version 2.73. *Technical Documentation for the DMI Road Weather Modelling system*, 31p, September 2004.
- Kmit M., B. Sass **1999**: Verification Report for the 1997-1998 Slippery Road Season. *DMI Technical Report N 99-1*, 32 p.
- Petersen N.K., Nielsen N.W., **2000**: Isbilmålinger i perioden januar - marts 1999. *DMI Teknisk Rapport 00-06*, 12 p.



- Petersen N.K., Nielsen N.W., **2003**: Analyse af isbilkørsler I vinteren 2002. *DMI Teknisk Rapport* 03-29, 25 p.
- Sass B., **1992**: A Numerical Model for Prediction of Road Temperature and Ice. *Journal of Applied Meteorology*, 31, pp. 1499-1506.
- Sass B., **1997**: A Numerical Forecasting System for the Prediction of Slippery Roads. *Journal of Applied Meteorology*, 36, pp. 801-817.
- Sass B., C. Petersen, **2000**: Verification Report for the 1998-1999 Slippery Road Season. *DMI Technical Report* N 00-02, 26 p.
- Sass B., Woetmann, N.W., Jorgensen, J.U., Amstrup, B., Kmit, M., K.S. Mogensen, **2002**: The operational DMI-HIRLAM system 2002 - version. *DMI Technical Report* N 02-05, 60 p.
- Petersen C., Sass B., Mahura A., Pedersen T., **2007**: Road Weather Modelling System: Verification for 2005-2007 Road Weather Seasons. *DMI Technical Report* N 07-11, 19 p.



Appendix 1. Changes in RWM Setup during Road Seasons

During the road weather seasons 2005-2008 several modifications and up-grades of both the DMI-HIRLAM and RWM systems, and RCM model have been done:

- **2005/2006:** On average about 99.7 % of the forecasts are performed without problems. Most errors have been caused by network or computer hardware errors. However, in October 2005 some model runs crashed as a result of numerical instabilities in the model. On average about 1 model run each month crashes due to numerical instabilities. The model setup was changed to perform 24 forecasts for road stations. Still the model deliver 5 hours forecast in a separate file and the 24 hour forecast in a separate file. The latter with a delay of about 20 minutes.
- **2006/2007:** On average about 99.7 % of the forecasts are performed without problems. Most errors have been caused by network or computer hardware errors. On average about 1 model run each month crashes due to numerical instabilities. On January 29 2007, the heat conductivity constant for road was changed from 2.0 to 1.5. From experimental data this coefficient should be about 1.5 for concrete and 0.8 for asphalt.
- **2007/2008:** On average about 99.7 % of the forecasts are performed without problems. Most errors have been caused by network or computer hardware errors. On average about 1 model run each month crashes due to numerical instabilities. The heat capacity for the surface scheme in HIRLAM was slightly modified to a lower value to get higher daily amplitude on temperature. A bug was identified which did not set the temperature for the lowest soil layer correctly to a climatic value. Instead a constant value for the year was used which is too high for the winter months.

Appendix 2. Verification of 2 m Air Temperature for Road Season 2007-2008

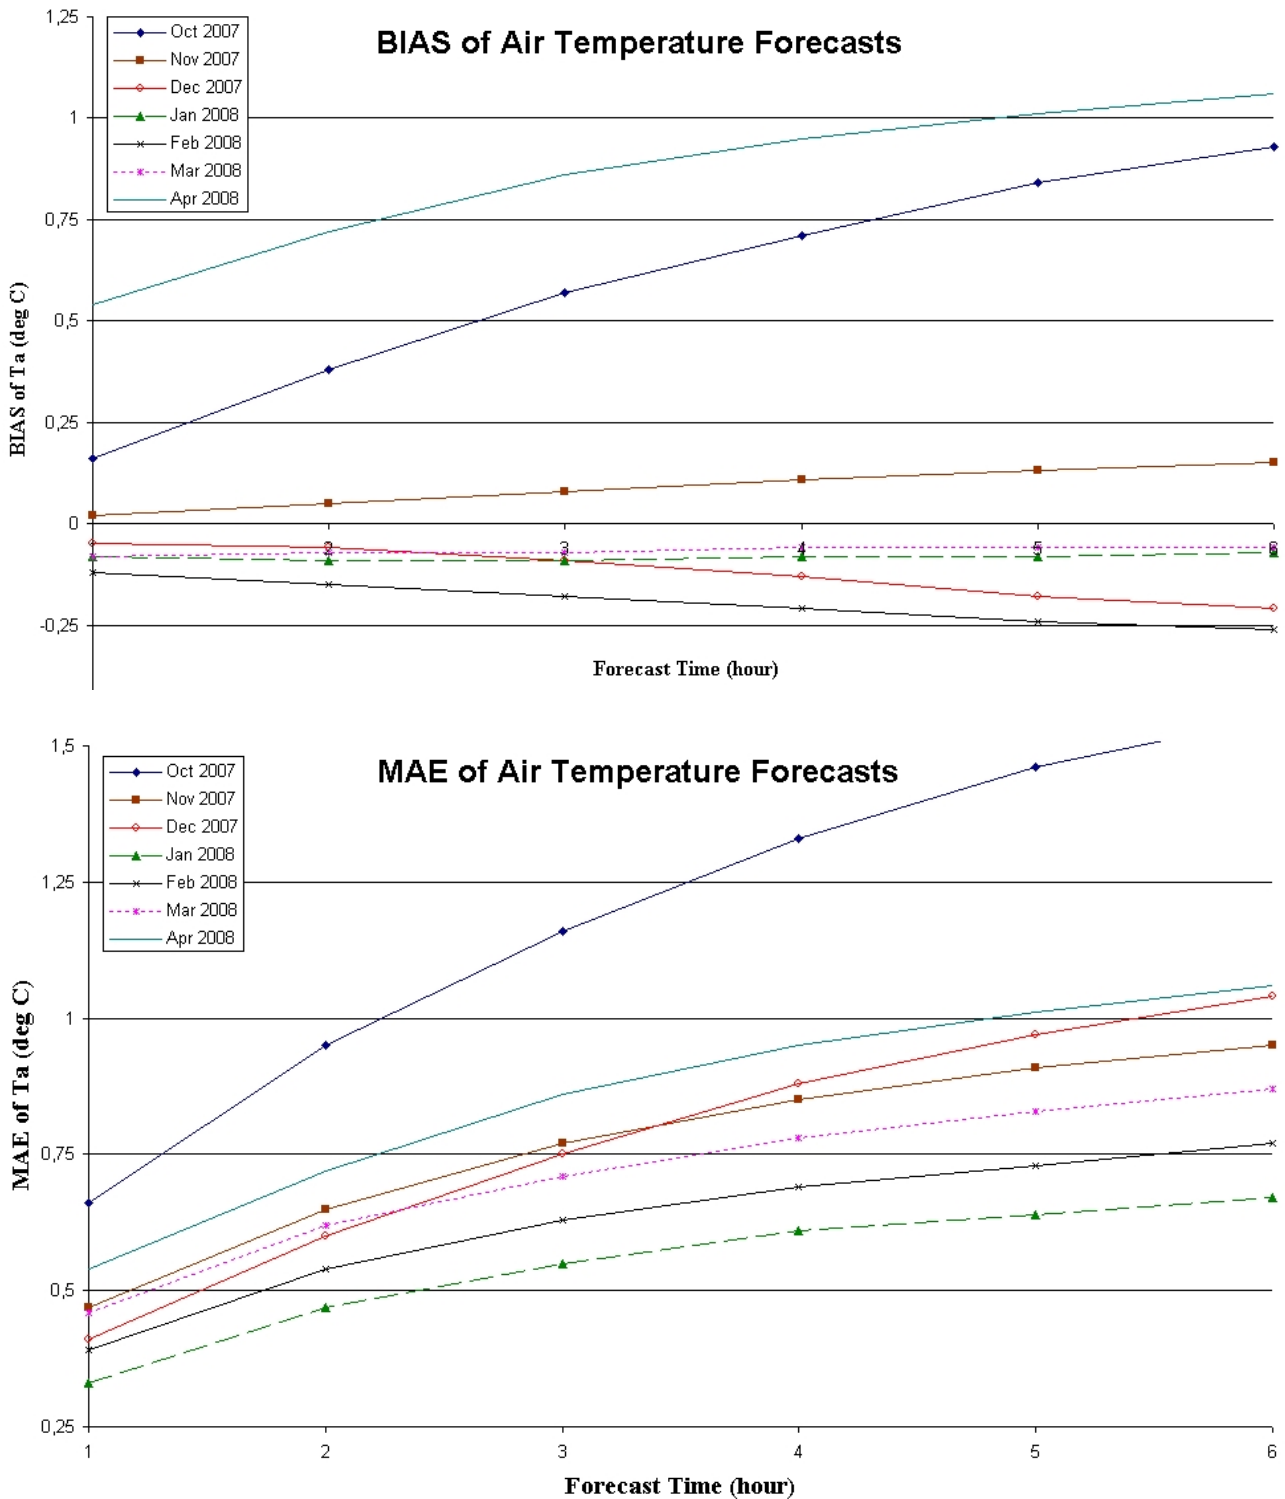


Figure 2A. Monthly variability of the mean error, BIAS (top) and mean absolute error, MAE (bottom) of the air temperature (Ta) vs. forecast time for the road weather season 2007-2008.



Appendix 3. Verification of 2 m Dew Point Temperature for Road Season 2007-2008

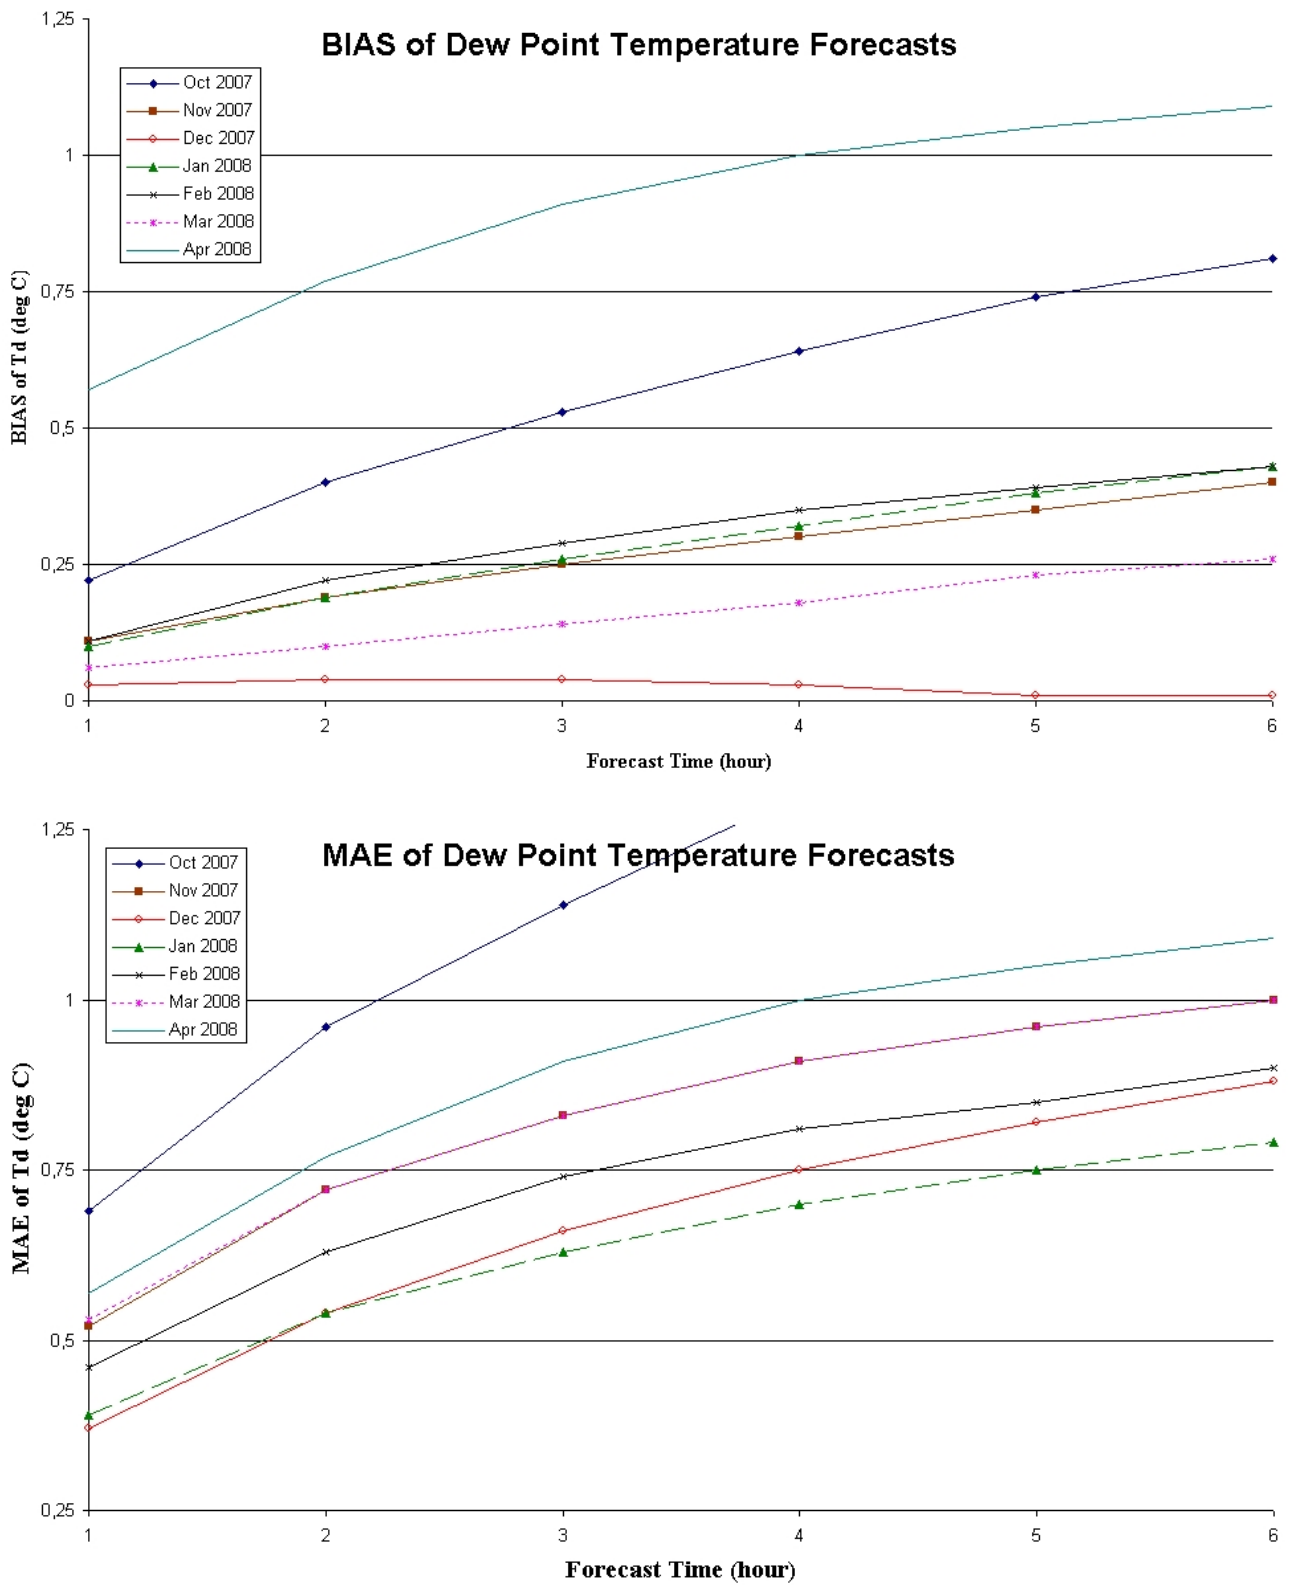


Figure 3A. Monthly variability of the mean error, BIAS (top) and mean absolute error, MAE (bottom) of the dew point temperature (Td) vs. forecast time for the road weather season 2007-2008.